




**BIG**  
SYSTEMS **b**  
▶ PRINT BRILLIANT

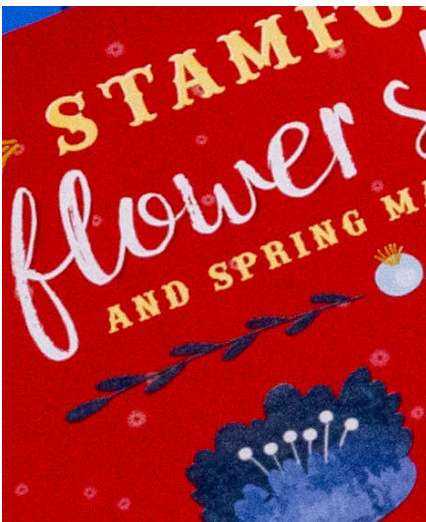

Print in color and white, on substrates that you would never have thought possible with a short-run printer. Designed to meet the needs of a diverse range of specialty print applications, the SP1360W delivers vibrant, high-quality color printing on a wide range of media. No matter if you're small business, commercial print provider or anything in between, the SP1360W has something to offer. The addition of white toner lets you do what most short-run print devices can't. Broaden your horizons with stunning white-on-color and brilliant color on dark media.

- Prints with CMYK plus White toner
- Prints White under CMYK in a single pass for full color on dark media
- End user replaceable consumables ensures minimum down time
- High-density White toner for outstanding coverage on color stock
- Up to 50 ppm CMYK/Mono, and 60 ppm COM 10 envelopes
- Low total cost of ownership (TCO)

## Specifications

<b>Print Speed</b>	CMYK/Mono	60 ppm COM 10 envelopes, 50 ppm Letter-size sheets, 27 ppm Tabloid sheets
	CMYKW	45 ppm Letter-size sheets
<b>Time to First Page</b>	CMYK/Mono	Approx. 8 seconds
<b>Duty Cycle</b>	Printers	300,000 pages max per month
<b>Print Quality</b>	Resolution	Up to 1200 x 1200 dpi; ProQ 1200 x 600 x 16 levels
<b>Memory</b>	RAM (Standard/Max)	2 GB
	Processor	1.2 GHz ARM CPU
<b>Compatibility</b>	Printer Languages	Adobe® PostScript 3™, PCL® 6, PCL 5c, XPS®
	Connectivity	High-speed USB 2.0, 10 Base-T/100 Base-TX/1000 Base-T Ethernet
	Operating Systems	Windows 10, Windows® 8, Windows 7, Windows Vista®, Windows XP, Windows Server 2012, Windows Server 2008, Windows Server 2008 R2, Windows Server 2003; Mac® OS 10.3.9 – 10.9
	Network Protocols	TCP/IP, EtherTalk
<b>Color Features/Solutions</b>	Standard	PostScript®driver supports trapping; Embedded ICC Profile-based workflow; Simulations for SWOP, ISO Coated, Japan Color; PDF Direct Print; PS Gamma Adjust; and Color Correct
<b>Media Handling</b>	Media Sizes	Trays 1 & 2: Up to 12.00" x 18.00". Multi-purpose Tray: Min 2.52" x 3.50" up to 13.00" x 52.01"
	Media Weight	Trays 1 & 2: 52 – 320 gsm. Multi-purpose Tray: 80 – 360 gsm
<b>Media Capacity</b>	Multi-purpose Tray	Up to 310 sheets
	Trays 1 & 2	Up to 580 sheets each
	High-Capacity Feeder (Optional)	Up to 1740 sheets (3 trays, 580 sheets each)
<b>Media Output</b>	Face Down	Max 610 sheets
	Face Up	Max 300 sheets
<b>Environmental</b>	Size (WxDxH)	27.5" x 26.18" x 25.2" (699 mm x 665 mm x 640 mm)
	Weight	215.2 lb. (97.6 kg) including consumables
	Temperature/Humidity	50° – 90°F (10° – 32°C)/20% – 80%RH
	Power Consumption	115V 15A Active 1600W max. /1100W avg.; Standby avg. 40W; PowerSave mode 30W or less; Sleep mode 4W or less; Auto Shutoff 0.4W or less.
	Noise Levels	Printer: Active 57dBA or less; Standby 34dBA or less; PowerSave mode – Inaudible
<b>Warranty</b>	Limited	1 year warranty