


# WideTEK® 36



## Scanning Speed


The scanning speed depends on the resolution alone. The WideTEK® scanners always scan in full color, even if bitonal image output is selected. This produces the best possible images. The following table shows the scan speed depending on the resolution.

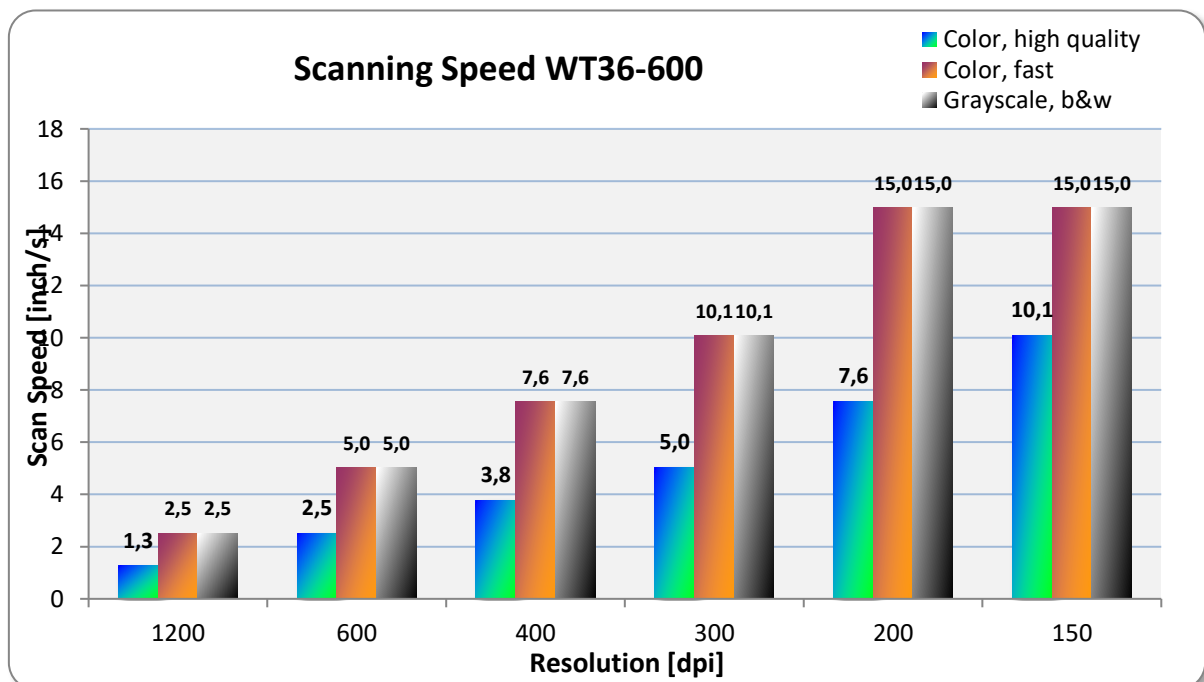


## Relation between Documents Length and Resolution

The maximum document length depends on three factors, resolution, color depths and document width. The WT36-600 has 16 GB memory build into the scanner, enough to scan a 36" wide document at 300dpi up to a length of 2589" or 66 m. The following tables show the relation between the scanning length, document width, resolution, and color depth.

### 24bit Color:

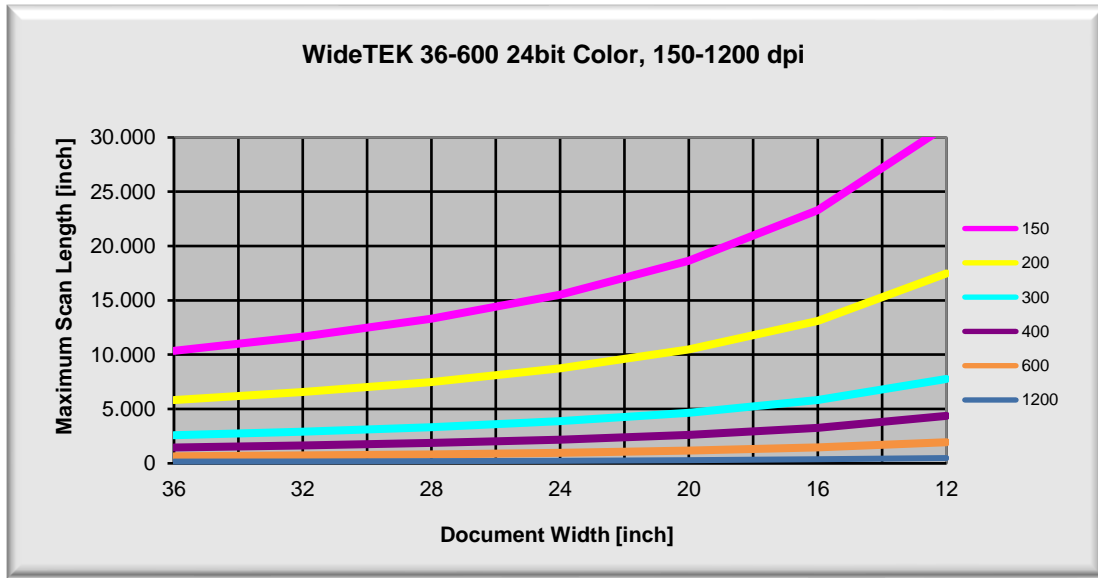

### 8bit Grayscale, Halftone and Bitonal:

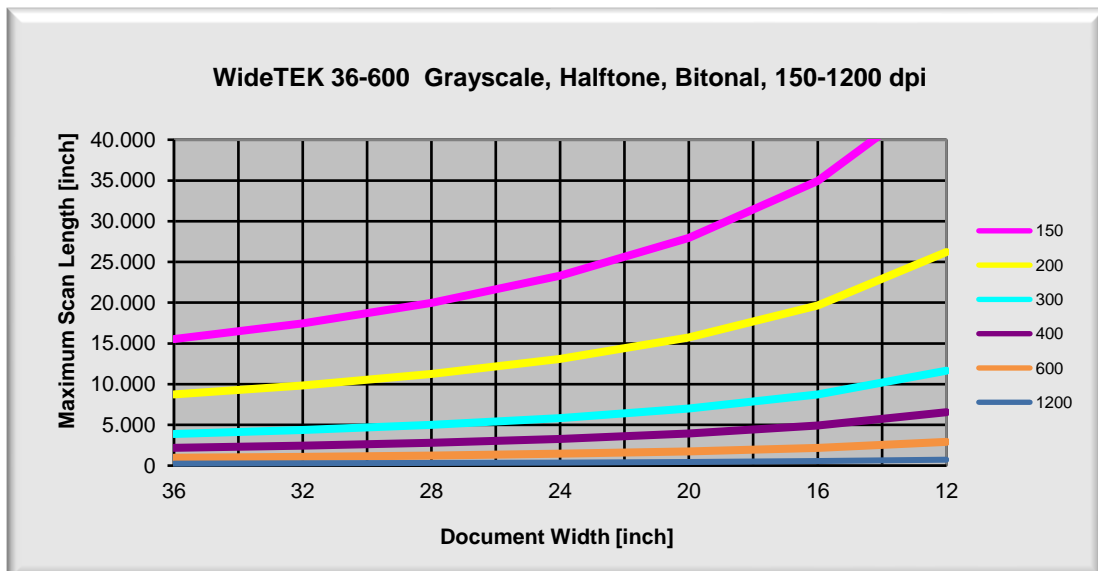

## Optical System

Document Width	950 mm (37.4 inch)
Scan Width	915 mm (36 inch)
Scan Direction	Face up
Scanner Resolution	1200 x 1200 dpi (optionally 9600 x 9600 dpi interpolated)
Optical Resolution	1200 x 600 dpi
Pixel Dimension	9.3 x 9.3 µm
Sensor Type	Three Tri-Color CCD, encapsulated and dust-proof
Color Depth	48 bit color (internal resolution) 16 bit gray scale (internal resolution)
Scan Modes	24 bit color, 8 bit grayscale, bitonal, enhanced halftone
File Formats	Multipage PDF (PDF/A) and TIFF, JPEG, JPEG 2000, PNM, PNG, BMP, TIFF (Raw, G3, G4, LZW, JPEG), AutoCAD DWF, JBIG, DjVu, DICOM, PCX, Postscript, EPS, Raw data and more

## Accuracy and Stitching

Stitching Target	Permanently built-in
Warm-up Time	None
Accuracy in Scan Direction	± 0.08% across 36 inch scanning width
Accuracy in Transport Direction	± 0.08%

## Illumination System

Light Source	Two linear lamps with white LEDs, integrated optical diffusor
Warm-up Time	None
Temperature Dependency	None
UV / IR Emission	None
Lamp Lifetime	50,000 hours typ. Lamps are covered by the Extended Warranty Option

## Electrical Specifications

### External Power Supply

Voltage	100 – 240 V AC
Frequency	47 – 63 Hz
Operating Temperature	5 to 40 °C (40 to 105 °F)
Relative Humidity	20 to 80% (non-condensing)
ECO Standard	CEC level VI

### Scanner

Voltage	24 V DC
Current	Max. 5 A

### Power Consumption

P <sub>(Off)</sub>	0.3W
P <sub>(Sleep)</sub>	4.7W
P <sub>(Ready)</sub>	60W
P <sub>(Active)</sub>	120W

61% below [ENERGY STAR requirements](#)

[Image Access FAQ](#)

## Document Specifications

Document Length	Up to 500 m (20.000 inch) <sup>1</sup>
Document Weight	Any. Straight paper path can handle the stiffest documents
Document Thickness	3 mm (0.1 inch) max.

<sup>1</sup> The maximum document length depends on the scan resolution and the scan output.

## Dimensions and Weight

Scanner Outer Dimensions (H x W x D)	228 x 1095 x 507 mm (9 x 43 x 20 inch)
Scanner Outer Dimensions (incl. Floor Stand) (H x W x D)	1070 x 1095 x 507 mm (42 x 43 x 20 inch)
Weight of Scanner	45 kg (99 lbs.)
Transport Box Dimensions (Scanner) (H x W x D)	450 x 1200 x 800 mm (18 x 47 x 31 inch)
Scanner Weight, Ready to Ship	92 kg (203 lbs.)

Transport Box Dimensions (Bundle) (H x W x D)	550 x 1200 x 800 mm (22 x 47 x 31 inch)
Weight of Bundle (Scanner, Floor Stand, Touchscreen)	70 kg (154 lbs.)
Bundle Weight, Ready to Ship	105 kg (231 lbs.)

## Ambient Conditions

Operating Temperature	5 to 40 °C (40 to 105 °F)
Storage Temperature	0 to 60 °C (32° to 140 °F)
Relative Humidity	20 to 80% (non-condensing)
Noise	< 35 dB(A) (Operating) < 25 dB(A) (Standby)

© 2023 by Image Access GmbH, Wuppertal, Germany.

Printed in Germany. All rights reserved. Reproduction in whole or in part in any form or medium without express written permission of Image Access is prohibited. Scan2Net®, Scan2Pad®, WideTEK® and Bookeye® are registered trademarks of Image Access. All other trademarks are the property of their respective owners.

Image Access reserves the right to change the described products, the specifications or documents at any time without prior notice. For the most recent version, always check our web site [www.imageaccess.de](http://www.imageaccess.de) or [www.imageaccess.us](http://www.imageaccess.us) or the customer service portal at [portal.imageaccess.de](http://portal.imageaccess.de)